




*Simply pump!*

# Customised <sup>Pumping</sup> solutions over three decades

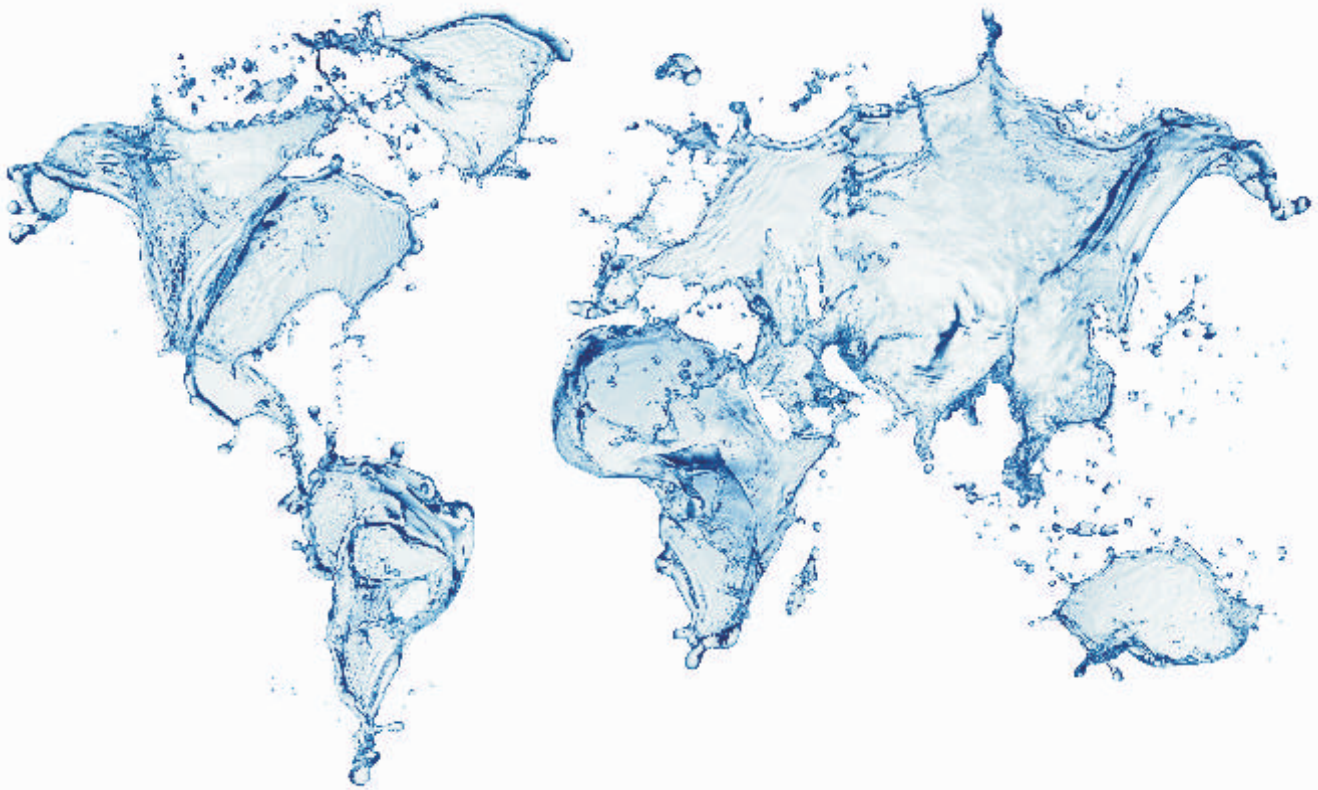

**DARLING PUMPS... present a specialised range of Pumpsets for Industrial processes, Construction Sites, Mining, Slurries, Dewatering, Sewage, High-rise Buildings, Hotels, Fountains, Commercial Buildings, Irrigation, Waterfalls and many such applications...**

## Profile

### Strong enough...

- ✓ User friendly design
- ✓ Easy maintenance
- ✓ Wide range of innovative products
- ✓ Appropriate knowledge support
- ✓ Dedication to high quality
- ✓ Futuristic technology
- ✓ TEAM DARLING approach
- ✓ Customized optimum solutions

### Team Darling stands for...

- Long term customer relationship
- Reliability, respectability and confidentiality
- Competent and innovative product support
- Ethics of relationships
- Mutual support and solidarity
- Careful and systematic approach to employee satisfaction

### Aims & achievements...

- ISO 9001:2008 Certification
- CE Certification
- Patent for Open well submersible pumps
- Development of critical application Slurry pumps
- Development of critical application Clear water, De-watering and Sewage pumps

*Our global presence : Europe, Canada, South Africa, Australia, Middle East, Malaysia, Vietnam, Sri Lanka, Nepal*

Better Products,  
Better Pumps...

**DARLING PUMPS®**  
Pioneers in Submersible

# Our products

## Clear Water Series



### TECHNICAL SPECIFICATIONS

Head	: Up to 150 MTRS
Capacity	: Up to 11000 LPM
Rating	: 0.75 to 110 kW
Winding	: PVC insulated (rewindable)
RPM	: 1450 / 2900
Seal	: Mechanical seal
Supply	: Single Phase, 160/230 V, 50 Hz Three phase, 360/440 V, 50Hz

### TECHNICAL SPECIFICATIONS

Head	: Up to 80 MTRS
Capacity	: Up to 12000 LPM
Rating	: 0.75 to 110 kW
Winding	: PVC insulated (rewindable)
RPM	: 1450 / 2900
Seal	: Single / Dual mechanical seal
Supply	: Single Phase, 160/230 V, 50 Hz Three phase, 360/440 V, 50Hz
Solids	: Up to 16mm



## Dewatering Series

## Waste Water Series



### TECHNICAL SPECIFICATIONS

Head	: Up to 53 MTRS
Capacity	: Up to 14000 LPM
Rating	: 0.22 to 110 kW
Winding	: PVC insulated (rewindable)
RPM	: 1450 / 2900
Seal	: Single / Dual mechanical seal
Supply	: Single Phase, 160/230 V, 50 Hz Three phase, 360/440 V, 50Hz
Solids	: Up to 100mm

### TECHNICAL SPECIFICATIONS

Head	: Up to 48 MTRS
Capacity	: Up to 12000 LPM
Rating	: 0.75 to 110 kW
Winding	: PVC insulated (rewindable)
RPM	: 1450 / 2900
Seal	: Dual mechanical seal
Supply	: Three phase, 360/440 V, 50Hz
Solids	: Up to 25mm



## Slurry Handling Series

\* Contact us for pumps above 55kW

For Distributorship / Contract Manufacturing / OEM Branding please write to us on - [exports@darlingpumps.in](mailto:exports@darlingpumps.in)

## DARLING PUMPS PVT. LTD.

SALES : 124, B-Wing, First Floor, Runwal Commercial Complex, L.B.S. Marg, Mulund (West), Mumbai - 400 080, India.

Tel : +91 22 25604451. Fax : +91 22 25682690.

E-mail : [dpplm@darlingpumps.in](mailto:dpplm@darlingpumps.in) / [dpplin@darlingpumps.in](mailto:dpplin@darlingpumps.in) • Website : [www.darlingpumps.in](http://www.darlingpumps.in)

EXPORTS - Tel : +91 9820541134. E-mail : [exports@darlingpumps.in](mailto:exports@darlingpumps.in)



Available at -